PTO/SB/17p (01-08)
Approved for use through 05/31/2008. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no person are required to respond to a collection of information unless it displays a valid OMB control number.

PETITION FEE
Under 37 CFR 1.17(f), (g) & (h)
TRANSMITTAL
(Fees are subject to annual revision)

Send completed form to: Commissioner for Patents
P.O. Box 1450, Alexandria, VA 22313-1450

Application Number	09/188,824
Filing Date	July 20, 1998
First Named Inventor	Jae Hun LEE
Art Unit	2615
Examiner Name	T. Q. Tran
Attorney Docket Number	0465-1984PUS1

Enclosed is a petition filed under 37 CFR __1.67 and 1.182__ that requires a processing fee (37 CFR 1.17(f), (g), or (h)). Payment of $ __400.00__ is enclosed.

This form should be included with the above-mentioned petition and faxed or mailed to the Office using the appropriate Mail Stop (e.g., Mail Stop Petition), if applicable. *For transmittal of processing fees under 37 CFR 1.17(i), see form PTO/SB/17i.*

Payment of Fees (small entity amounts are NOT available for the petition fees).

[X] The Commissioner is hereby authorized to charge the following fees to Deposit Account No. __02-2448__ :

    [X] petition fee under 37 CFR 1.17(f), (g) or (h)   [X] any deficiency of fees and credit of any overpayments

    Enclose a duplicative copy of this form for fee processing.

[ ] Check in the amount of $ _____ is enclosed.

[ ] Payment by credit card (Form PTO-2038 or equivalent enclosed). Do not provide credit card information on this form.

Petition Fees under 37 CFR 1.17(f):   Fee $400   Fee Code 1462

For petitions filed under:
§ 1.36(a) – for revocation of a power of attorney by fewer than all applicants
§ 1.53(e) – to accord a filing date.
§ 1.57(a) – to accord a filing date.
§ 1.182 – for decision on a question not specifically provided for.
§ 1.183 – to suspend the rules.
§ 1.378(e) – for reconsideration of decision on petition refusing to accept delayed payment of maintenance fee in an expired patent.
§ 1.741(b) – to accord a filing date to an application under § 1.740 for extension of a patent term.

Petition Fees under 37 CFR 1.17(g):   Fee $200   Fee Code 1463

For petitions filed under:
§ 1.12 – for access to an assignment record.
§ 1.14 – for access to an application.
§ 1.47 – for filing by other than all the inventors or a person not the inventor.
§ 1.59 – for expungement of information.
§ 1.103(a) – to suspend action in an application.
§ 1.136(b) – for review of a request for extension of time when the provisions of section 1.136(a) are not available.
§ 1.295 – for review of refusal to publish a statutory invention registration.
§ 1.296 – to withdraw a request for publication of a statutory invention registration filed on or after the date the notice of intent to publish issued.
§ 1.377 – for review of decision refusing to accept and record payment of a maintenance fee filed prior to expiration of a patent.
§ 1.550(c) – for patent owner requests for extension of time in *ex parte* reexamination proceedings.
§ 1.956 – for patent owner requests for extension of time in *inter partes* reexamination proceedings.
§ 5.12 – for expedited handling of a foreign filing license.
§ 5.15 – for changing the scope of a license.
§ 5.25 – for retroactive license.

Petition Fees under 37 CFR 1.17(h):   Fee $130   Fee Code 1464

For petitions filed under:
§ 1.19(g) – to request documents in a form other than that provided in this part.
§ 1.84 – for accepting color drawings or photographs.
§ 1.91 – for entry of a model or exhibit.
§ 1.102(d) – to make an application special.
§ 1.138(c) – to expressly abandon an application to avoid publication.
§ 1.313 – to withdraw an application from issue.
§ 1.314 – to defer issuance of a patent.

Signature	Date
Esther Chong	May 20, 2008
Esther H. Chong	40,953
Typed or printed name	Registration No., if applicable

IN THE U.S. PATENT AND TRADEMARK OFFICE

APPLICANT: Je H. LEE et al.

APPLICATION NO.:   09/118,824
(Subsequently reissued as U.S. RE38,868 on
November 8, 2005)
(Reissue of U.S. Patent No. 5,587,789, which issued on
December 24, 1996)

FILED: July 20, 1998

FOR: APPARATUS AND METHOD FOR CONTROLLING
RECORDING AND REPRODUCTION IN DIGITAL
VIDEO CASSETTE TAPE RECORDER

ART UNIT: 2615

EXAMINER: Thai Tran

Mail Stop Petition
Commissioner For Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450   May 20, 2008

PETITION UNDER 37 C.F.R. §§ 1.67 AND 1.182 TO PLACE SUPPLEMENTAL DECLARATION AND SWORN STATEMENT IN FILE

Sir:

Pursuant to 37 C.F.R. §§ 1.67 and 1.182, patentees and their assignee (hereafter, "Petitioners") hereby petition that the Second Supplemental Declaration of Jehyoung Lee and the Supplemental Sworn Statement of Dae Sul Shim be placed in the file of U.S. RE38,868 ("the '868 Reissue Patent"), which reissued on November 8, 2005 from U.S. reissue application 09/118,824 ("the '824 Reissue Application").

If, for some reason, the Petition under 37 C.F.R. § 1.182 is dismissed or not granted, please treat this as a Petition pursuant to 37 C.F.R. § 1.183, wherein Petitioners hereby petition that the Second Supplemental Declaration of Jehyoung Lee and the Supplemental Sworn Statement of Dae Sul Shim be placed in the file of the '868 Reissue Patent.

Petitioners currently have another Petition Under 37 C.F.R. §§ 1.67 and 1.182 To Place Supplemental Declarations And Sworn Statements In File pending before the U.S. Patent and Trademark Office ("U.S.P.T.O."), which was filed on March 17, 2008. That petition also concerns the '868 Reissue patent.

By this Petition, Petitioners seek to submit the above-referenced Second Supplemental Declaration of Jehyoung Lee, one of the co-inventors of the '868 Reissue Patent, because Quanta Computer Inc. and Quanta Computer USA, Inc., defendants in *LG Electronics v. Quanta Computer Inc., et. al.*, Civ. Action No. 07-C-0361, a case pending in the Western District of Wisconsin in which the '868 Reissue Patent is a patent-in-suit, assert that Mr. Lee did not properly "review" the '824 Reissue Application at the time he authorized his signature on the Combined Reissue Declaration and Power of Attorney for the '824 Reissue Application (the "Reissue Declaration"). However, even though Mr. Lee did not physically review the '824 Reissue Application, Mr. Lee nonetheless understood and approved the content of the '824 Reissue Application at the time he authorized his signature, and he believed in good faith that he had a sufficient understanding of the '824 Reissue Application

to authorize that the Reissue Declaration be signed on his behalf. The Second Supplemental Declaration of Mr. Lee indicates that such procedure was undertaken by Mr. Lee in good faith and without any intent to deceive the U.S.P.T.O.

Petitioners also seek to submit the above-referenced Supplemental Sworn Statement of Dae Sul Shim, who was the employee of the assignee involved in the preparation and filing of materials related to the '824 Reissue Application, and who received authorization by Mr. Lee to sign the Reissue declaration on Mr. Lee's behalf. The Supplemental Sworn Statement of Mr. Shim indicates that Mr. Shim believed in good faith that Mr. Lee had sufficiently "reviewed and underst[ood] the contents of the ['824] reissue application including original claims 1-22 and newly submitted claims 23-58," as stated in the Reissue Declaration, and Mr. Shim did not intend to deceive the U.S.P.T.O. at the time that Mr. Shim had Mr. Lee's name applied to the Reissue Declaration on Mr. Lee's behalf.

The Second Supplemental Declaration of Jehyoung Lee and Supplemental Sworn Statement of Dae Sul Shim set forth the facts and circumstances in which the Reissue Declaration was understood and approved by Mr. Lee, and Petitioners, in an observance of good faith and candor, petition to have the Second Supplemental Declaration and Sworn Statement placed in the '868 Reissue Patent file wrapper.

Although there are no regulations or provisions specifically directed to the filing of supplemental declarations and sworn statements of the type attached hereto, Petitioners respectfully note that a similar petition was filed with the U.S.P.T.O.

under the facts set forth in *Ajinomoto Co., Inc. v. Archer-Daniels-Midland Co.*, 228 F.3d 1338, 1344 (Fed. Cir. 2000), and that procedure was acknowledged by the U.S. Court of Appeals for the Federal Circuit in that case.[1] In *Ajinomoto*, the patentee discovered during litigation that not all of the inventors personally signed declarations that were submitted during prosecution. *See id.* Instead, some of the inventors authorized others to sign on their behalf. *See id.* Upon this discovery, the patentee filed with the U.S.P.T.O. a supplemental declaration that contained the true signatures of the inventors, along with a petition to the Commissioner of Patents and Trademarks pursuant 37 C.F.R. §§ 1.67 and 1.182 requesting that the U.S.P.T.O. place the supplemental declaration in the patent's file wrapper. *See Ajinomoto Co., Inc. v. Archer-Daniels-Midland Co.*, 1998 U.S. Dist. LEXIS 3833 at 24 (D. Del. 1998). In affirming the district court's finding that the patent-in-suit was valid, the Federal Circuit took into consideration the patentee's supplemental declaration, which stated that the procedure followed for the prior declarations, wherein some of the inventors authorized others to sign on their behalf, "was the result of a lack of knowledge of the technical requirements of U.S. patent law and was made without deceptive intent." *See Ajinomoto*, 228 F.3d at 1344. Petitioners seek to utilize procedures similar to those used by the applicant in *Ajinomoto*.

---

[1] Petitioners take this opportunity to rectify the statement made in its March 17, 2008 Petition that the petition filed in the *Ajinomoto* case "was granted" by the U.S.P.T.O. Even though the Federal Circuit relied on statements made in the submitted declarations to conclude that the patent-in-suit was valid, the Court did not mention the disposition of the petition enclosing the declarations, and, at this time, Petitioners are unable to confirm whether that petition was granted by the U.S.P.T.O. *Ajinomoto*, 228 F.3d 1344.
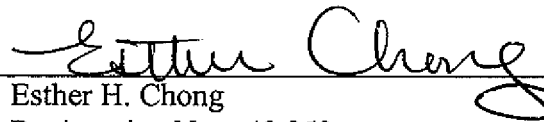
This Petition is accompanied by:

(1) The Supplemental Declaration of Jehyoung Lee, dated May 15, 2008;

(2) The Supplemental Sworn Statement of Dae Sul Shim, dated May 15, 2008;

(3) Authorization to charge $400.00 to Deposit Account No. <u>022448</u> in payment of the petition fee set forth in 37 C.F.R. § 1.17(f). The Director is also authorized to charge any other fees that may be required, or credit any overpayment to Deposit Account No. <u>022448</u>.

Accordingly, Petitioners respectfully request that this Petition be granted and the above-identified Supplemental Declaration and Supplemental Sworn Statement be placed in the file of the '868 Reissue Patent. Early and favorable consideration of this Petition is respectfully requested. Please contact the undersigned at the telephone number below for any outstanding matters.

May 20, 2008   Respectfully submitted,

Esther H. Chong
Registration No.: 40,953
BIRCH, STEWART, KOLASCH & BIRCH, LLP
8110 Gatehouse Road
Suite 100 East
P.O. Box 747
Falls Church, Virginia 22040-0747
(703) 205-8000
Attorney for Applicant

IN THE U.S. PATENT AND TRADEMARK OFFICE

APPLICANT:	Je H. LEE et al.
SERIAL NO.:	09/118,824 (Subsequently reissued as U.S. RE38,868 on November 8, 2005) (Reissue of U.S. Patent No. 5,587,789, which issued on December 24, 1996)
FILED:	July 20, 1998
FOR:	APPARATUS AND METHOD FOR CONTROLLING RECORDING AMD REPRODUCTION IN DIGITAL VIDEO CASSETTE TAPE RECORDER

SECOND SUPPLEMENTAL DECLARATION OF JEHYOUNG LEE

This Supplemental Declaration is supplemental to the Combined Declaration and Power of Attorney filed on April 13, 1994, which was filed in relation to U.S. application 08/227,281. This Supplemental Declaration is also supplemental to the Combined Reissue Declaration and Declaration of Attorney filed on July 20, 1998, the Supplemental Reissue Declaration filed on December 20, 1999, the Supplemental Declaration For Reissue Patent Application To Correct "Errors" Statement filed on June 4, 2002, and the Supplemental Declaration of Jehyoung Lee filed with U.S. Patent and Trademark Office on March 17, 2008 with a Petition Under 37 §§ 1.67 and 1.182 To Place Supplemental Declarations and Sworn Statements In File, each of which was filed in relation to U.S. reissue application 09/118,824.

I, <u>Jehyoung Lee</u>, declare as follows:

My name, citizenship and residence are indicated below.

I am a named co-inventor of U.S. RE38,868 ("the '868 Reissue Patent"),

which reissued on November 8, 2005 from reissue application 09/118,824 ("the

'824 Reissue Application"). The '868 Reissue Patent is a reissue of U.S. Patent

5,587,789 ("the Original '789 Patent"), which issued from U.S. patent application

08/227,281 ("the Original '281 Application"), and of which I am also a named co-

inventor.

In view of my prior review and understanding of the content and claims of

the Original '281 Application, and in further view of the information Mr. Dae Sul

Shim from LG Electronics, Inc. provided to me via email regarding the substance

of the Combined Reissue Declaration and Power of Attorney for the '824 Reissue

Application (the "Reissue Declaration"), I understood and approved the content of

the '824 Reissue Application when I authorized Mr. Shim to have my name signed

on the Reissue Declaration on my behalf in July 1998.

I have been informed that Quanta Computer Inc. and Quanta Computer

USA, Inc., defendants in *LG Electronics v. Quanta Computer Inc., et. al.*, Civ.

Action No. 07-C-0361, a case pending before the Western District of Wisconsin in

which the '868 Reissue Patent is a patent-in-suit, assert that I did not properly

"review" the '824 Reissue Application. I disagree. In July 1998, when I authorized

signature, I believed in good faith that I had a sufficient understanding of the '824

Reissue Application to authorize Mr. Shim to have the Reissue Declaration signed

on my behalf. By authorizing my signature without physically reviewing the '824

Reissue Application, I did not intend to deceive the U.S. Patent and Trademark

Office. To the extent my belief about what was required is incorrect, I have re-read

and re-reviewed a physical copy of the '824 Reissue Application (attached hereto as

Exhibit A), and I understand and approve its contents, including original claims 1-

22 and the reissue claims 23-58.

I further declare that all statements made herein of my own knowledge are

true, and that all statements made on information and belief are believed by me to

be true. These statements are made with the knowledge that willful false

statements and the like so made are punishable by fine or imprisonment, or both,

under Section 1001 of Title 18 of the United States Code and that such willful false

statements may jeopardize the validity of RE38,868.

Jehyoung LEE   Signature: _Jehyeny Lee_____

                                 Date:_ May 15. 2008_

Citizenship: Republic of Korea
Residence: 19608 Pruneridge Ave., Apt. # 9105
                      Cupertino, CA 95014

EXHIBIT A

United States Patent [19]

Lee et al.

[54] APPARATUS AND METHOD FOR
CONTROLLING RECORDING AND
REPRODUCTION IN DIGITAL VIDEO
CASSETTE TAPE RECORDER

[75] Inventors: Je H. Lee; Soo K. Kim; Sang J. Woo;
Tae S. Yang, all of Seoul, Rep. of
Korea

[73] Assignee: Goldstar Co. Ltd., Seoul, Rep. of
Korea

[21] Appl. No.: 227,281

[22] Filed: Apr. 13, 1994

[30] Foreign Application Priority Data

Apr. 16, 1993 [KR] Rep. of Korea 6441/1993

[51] Int. Cl.^{6} H04N 5/76; H04N 5/92
[52] U.S. Cl. 386/68; 386/80; 386/81;
386/95; 386/109
[58] Field of Search 348/411; 358/310,
358/312, 335; 360/10.1, 10.2, 10.3, 32,
48, 18; H04N 5/76, 5/92, 9/79

[56] References Cited

U.S. PATENT DOCUMENTS

4,651,227	3/1987	Yunoki et al.	358/335
4,663,673	5/1987	Doutsubo	360/10.2
4,802,019	1/1989	Harada et al.	358/335
5,057,949	10/1991	Suge et al.	360/10.2
5,122,886	6/1992	Tanaka	358/335
5,150,210	9/1992	Hoshi et al.	348/411
5,239,418	8/1993	Tyler et al.	358/335
5,239,429	8/1993	Hoshi .	
5,247,400	9/1993	Asai	358/335
5,335,125	8/1994	Nakatsu et al.	358/335
5,406,382	4/1995	Adachi	358/335
5,438,458	8/1995	Honjo	360/10.2

Vi

Label
INTERFACE — 1
BUFFER — 20, 22
FRAME MEMORY — 23
FRAME DETECTOR — 24
MULTIPLEXER — 21, 25
BIT STUFFING CIRCUIT — 26
MULTIPLEXING TIMING GENERATOR — 27
TRACK NUMBER CALCULATOR — 28
INTERLEAVING AND CHANNEL DIVIDING CIRCUIT — 2
RECORDING FORMATTER — 3A, 3B
CHANNEL MODULATOR — 4A, 4B
FRAME POSITION RECORDER — 29
INDEX SIGNAL RECORDER — 30

Signal labels: V1, V22, V23, V25, V2, V3, V4, V5, V6, V7, V27, V27', V28, V29, V30, SWP, WE, WD

SW1, SW2, 5A, 5B, 6, 7, 8, 9, 18, 19, 31

HO1, HO2, HO3, HO4

FOREIGN PATENT DOCUMENTS

0461649	12/1991	European Pat. Off. .
0505985	9/1992	European Pat. Off. .
0513744	11/1992	European Pat. Off. .
3437182	4/1986	Germany .
3831277	3/1990	Germany .
4037178	6/1991	Germany .

OTHER PUBLICATIONS

Int's Organization for Standardization, ISO/IEC JTC1/SC29/WG11 MPEG 93/251, Mar. 1993, Jill Boyce et al. "Fast Scan Technology for MPEG Video Tape Recorders".

Primary Examiner—Thai Q. Tran

[57] ABSTRACT

An apparatus and method for controlling recording and reproduction in a video cassette tape recorder are disclosed. The apparatus is capable of, in a recording mode, separating specific data for speed-varied reproduction from compressed digital video signals, recording them on designated tracks, recording position information of the designated tracks on a control track by an index head or recording position information of recording position-synchronized blocks at the starting portions of the designated tracks recorded with the specific data, and in a speed-varied reproduction mode, controlling a capstan servo speed so as to maintain the travel of a magnetic tape at a normal speed and periodically or non-periodically accelerate or decelerate it where specific data for varied-speed have been recorded periodically or non-periodically on predetermined portions of tracks, thereby making heads travel repeatedly at the normal speed and the high speed and thereby detect continuously the specific tracks for varied-speed. A repeatability of reproduced video at a varied speed is obtained without any deterioration in picture quality, because of recording of the specific data for speed-varied reproduction and the continuous detection of the specific data in the speed-varied reproduction.

22 Claims, 10 Drawing Sheets

APPARATUS AND METHOD FOR CONTROLLING RECORDING AND REPRODUCTION IN DIGITAL VIDEO CASSETTE TAPE RECORDER

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a circuit device and method for controlling recording and reproduction in a digital cassette tape recorder.

2. Description of the Background Art

For analog/digital conversion for converting an analog video signal into a digital video signal and linear quantization, a signal transmission rate of about 100 Mega bits per second is typically required in the case of a normal TV broadcast signal such as NTSC, SECAM and PAL signals. On the other hand, a high definition TV (HDTV) signal with higher resolution than that of the normal TV broadcast signal requires a signal transmission rate higher than 100 Mega bits.

For achieving data transmission in a limited transmission band, digitalized video signals should be transmitted in the form compressed in accordance with the video data compression technique. In the case of digital cassette tape recorders (digital VCRs) having a limitation on record bandwidth, signals recorded on a magnetic tape may be digital normal TV signals having the form of compressed signals or digital HDTV signals having the form of compressed signals.

Referring to FIG. 1, there is illustrated a conventional recording circuit for such a digital VCR. As shown in FIG. 1, the recording circuit includes an interface 1 for converting a compressed digital video signal into a signal having the recordable form, an interleaving and channel-dividing circuit 2 for interleaving an output V1 from the interface 1 in a predetermined form to reduce burst error and channel-dividing it to be matched with the zero bandwidth of a recording channel, recording formatters 3A and 3B for respectively converting outputs V2 and V3 of the interleaving and channel-dividing circuit 2 to record formats each including a synchronous signal, an identification signal and redundancy bits for error correction codes, channel modulators 4A and 4B for modulating outputs V4 and V5 of the recording formatters 3A and 3B, respectively, recording amplifiers 5A and 5B for amplifying outputs V6 and V7 of the channel modulators 4A and 4B, respectively, a drum pulse generator 7 for outputting two pulses at every rotation of a head drum 6 caused by driving a drum motor M1, and switches SW1 and SW2 for performing their switching operations based on an output SWP from the drum pulse generator 7 to selectively transmit outputs V8 and V9 of the recording amplifiers 5A and 5B to heads HD1 (or HD3) and HD2 (or HD4), respectively. In FIG. 1, the reference numeral 8 denotes a guide pin, 10 a pinch roller, and 9 a capstan adapted to be rotated by a capstan motor M2.

FIG. 2 is a block diagram illustrating a conventional reproduction circuit for the digital VCR. As shown in FIG. 2, the reproduction circuit includes reproduction amplifiers 11A and 11B for receiving outputs from selected heads HD1 (or HD3) and HD2 (or HD4) mounted on the head drum 6 via the switches SW1 and SW2 switched in accordance with the output SWP from the drum pulse generator 7 and amplifying them, respectively, equalizers 12A and 12B for compensating distortions of frequency characteristics of outputs V10 and V11 of the reproduction amplifiers 11A and

11B, respectively, channel demodulators 13A and 13B for demodulating outputs V12 and V13 of the equalizers 12A and 12B, respectively, sync-detecting and error-correcting circuits 14A and 14B for detecting synchronous signals SYNC added in a recorded signal from the outputs V14 and V15 of the channel demodulators 13A and 13B and correcting errors of the outputs V14 and V15, respectively, deinterleaving circuits 15A and 15B for deinterleaving outputs V16 and V17 of the sync-detecting and error-correcting circuits 14A and 14B into the original signal form, respectively, a deformatter 16 for recovering outputs V18 and V19 of the deinterleaving circuits 15A and 15B to the original signal format, and an interface 17 for converting an output V20 of the deformatter 16 into a reproduced digital signal Vo and outputting it.

· Now, operations of the conventional circuits will be described in conjunction with FIGS. 1 to 6.

First, in a recording mode, a compressed HDTV signal or compressed normal TV signal is applied to the interface 1 which, in turn, converts the received signal into a signal V1 capable of being recorded and reproduced. The signal V1 is then interleaved into a predetermined form to reduce burst errors in the interleaving and channel-dividing circuit 2 which, in turn, outputs signals V2 and V3 channel-divided so as to be matched with the bandwidth of the recording channel.

The outputs V2 and V3 from the interleaving and channel-dividing circuit 2 are applied to the recording formatters 3A and 3B and then added with synchronous signals SYNC, identification signals ID and redundancy bits for error correction codes ECC in the recording formatters 3A and 3B. Resultant signals from the recording formatters 3A and 3B are then received in the channel modulators 4A and 4B which, in turn, output signals V6 and V7 matched with a predetermined recording format, respectively. The outputs V6 and V7 from the channel modulators 4A and 4B are applied to the recording amplifiers 5A and 5B which, in turn, amplify them, respectively.

Outputs V8 and V9 from the recording amplifiers 5A and 5B are applied to selected heads HD1 (or HD3) and HD2 (or HD4) via the switches SW1 and SW2 switched by the output SWP from the drum pulse generator 7, so that they are recorded on a magnetic tape in a recording format shown in FIG. 3.

In this case, the drum pulse generator 7 generates two pulses at every rotation of the head drum 6 driven by the drum motor M1.

Meanwhile, frames have a mixed form of intra-frames (I-frames) able to be independently decoded and predictive frames (P-frames) compressed by moving information of previous screen and unable to be independently decoded, in accordance with a video compression system for HDTV signals or an MPEG (Moving Picture Experts Group) system. Bit rate generated in each frame is non-uniform, as shown in FIG. 5.

In a reproduction mode, the magnetic tape travels by the rotation of the capstan 9 caused by the capstan motor M2 while being in contact with the head drum 6 rotating by the driving force of the drum motor M1. At this time, the heads HD1 (or HD3) and HD2 (or HD4) detect signals on the magnetic tape and send them to the reproduction amplifiers 11A and 11B via the switches SW3 and SW4 switched by the output SWP of the drum pulse generator 7, respectively.

The signals received in the reproduction amplifiers 11A and 11B are amplified to a predetermined level and then sent to the equalizers 12A and 12B which, in turn, output signals

V12 and V13 having compensated frequency characteristics, respectively. The signals V12 and V13 from the equalizers 12A and 12B are then applied to the channel demodulators 13A and 13B, respectively, so as to be demodulated. Outputs V14 and V15 from the channel demodulators 13A and 13B are received in the sync-detecting and error-correcting circuits 14A and 14B which, in turn, detect respectively synchronous signals SYNC and identification signals ID from synchronous block of the received signals and remove error components included in the data.

Outputs V16 and V17 from the sync-detecting and error-correcting circuits 14A and 14B are applied to the deinterleaving circuit 15A and 15B which, in turn, deinterleave the signals V16 and V17 and thereby generate signals V18 and V19 having the original signal forms, respectively. The signals V18 and V19 are received in the deformatter 16 and thereby converted to the format having the signal form prior to recording. Signal V20 from the deformatter 16 is applied to the interface 17 which, in turn, generates a reproduced digital signal Vo.

In a speed-varied reproduction, the rotation speed of the head drum 6 is kept constant while the travel of the magnetic tape is accelerated. As a result, the heads HD1 to HD4 travel across tracks on the magnetic tape. The trace of the heads is shown in FIG. 3. Consequently, the detected signals have a discontinuous data form, namely, data burst with a magnitude inversely proportional to the travel speed of the magnetic tape.

In the case of existing analog VCRs, data of one field are recorded in one track in the reproduction order. Accordingly, regions on tracks from which data are detected in the speed-varied reproduction mode are directly associated with reproduction regions of a corresponding screen. Therefore, video reproduction in the speed-varied mode is possible even when a noise bar is generated due to data detected on an adjacent track.

In the case of existing digital VCRs, however, data of one field are recorded in a plurality of tracks, as shown in FIG. 3. As a result, reproduction bursts on adjacent tracks have no relation with the reproduction order. In this case, therefore, a frame memory and an addressing process for rearranging data detected are needed. Furthermore, there is a problem of an inevitable mosaic-shaped distortion of small segments due to discontinuous detection of data bursts.

For a video reproduction in the existing digital VCRs, data bursts detected should be independently decoded. However, these data bursts include unrecoverable other data on the screen or unrecoverable previous screen data, because the data bursts have the digital form compressed using the correlation between signals that may be the important factor of adversely affecting the picture quality in reproduction. The unrecoverable data can not be decoded and thereby reproduced in the form of videos. In particular, such a problem becomes more frequent in the case of data obtained from the video compression system such as the variable length coding involving non-uniform data lengths.

In other words, although data bursts detected from tracks on which data of the 0-th I-frame, the n-th I-frame, the 2n-th I-frame ... are recorded can be constructed to a video, data bursts detected from tracks on which data of P-frames are recorded can not be constructed to a video.

SUMMARY OF THE INVENTION

Therefore, an object of the invention is to provide an apparatus and method for controlling recording and repro-

11

duction in a digital VCR capable of, in a recording mode, extracting independently-decodable data, namely, intra-frames from digital signals having a compressed form so as to record them on tracks designated with respect to a number of different tape speeds and, in a speed-varied reproduction mode, repeatedly performing a normal-speed travel and a high-speed travel of a magnetic tape so as to detect specific data for speed-varied reproduction periodically or non-periodically recorded on tracks of the magnetic tape, thereby reproducing videos with improved picture quality.

In accordance with the present invention, this object can be accomplished by providing an apparatus for controlling recording and reproduction in a video cassette tape recorder comprising: frame extracting means for buffering and amplifying compressed digital data input, and extracting specific data for a speed-varied reproduction from the compressed digital data; frame recording position controlling means for calculating the number of tracks for the compressed digital data, selectively outputting a buffered and amplified output and the extracted specific data from said frame extracting means, and outputting a multiplexing timing signal; frame position information recording means for recording position information of tracks for a speed-varied reproduction and index information on a magnetic tape, based on the multiplexing timing signal; digital recording means for recording the digital signals including the index information on the magnetic tape; digital reproduction means for reproducing the digital signals recorded on the magnetic tape; frame position information detecting means for detecting position information of specific tracks for the speed-varied reproduction and index information tape speed controlling means for controlling the speed of a capstan motor, based on the detected index information and position information of the specific tracks; and frame removing means for receiving therein the output from the digital reproduction means and removing unnecessary bit streams from the specific data. Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, features and advantages of the invention will become more apparent upon a reading of the following detailed specification and drawings which are given by way of illustration only, and thus are not limitative of the present invention, in which:

FIG. 1 is a block diagram of a conventional recording circuit for a digital VCR;

FIG. 2 is a block diagram of a conventional reproduction circuit for a digital VCR;

FIG. 3 is a schematic view illustrating recording tracks of a magnetic tape and a trace of heads travelling in a speed-varied reproduction mode in accordance with the conventional art;

FIG. 4 is a schematic view illustrating a correlation among frames in accordance with a video compression system;

FIG. 5 is a schematic view illustrating an encoded bit stream;

FIG. 6 is a schematic view illustrating synchronous blocks of a video signal for recording and reproduction;

FIG. 7 is a block diagram of a recording control circuit for a digital VCR in accordance with an embodiment of the present invention;

FIG. 8 is a block diagram of a reproduction control circuit for a digital VCR in accordance with an embodiment of the present invention;

FIG. 9 is a schematic view illustrating recording tracks in accordance with the present invention;

FIGS. 10A to 10D are waveform diagrams of signals generated in recording position control;

FIG. 11 is a schematic view illustrating recording position-synchronized blocks in accordance with the present invention;

FIG. 12 is a flow chart illustrating a frame detection procedure in accordance with the present invention;

FIGS. 13A to 13C illustrate a capstan servo speed control in accordance with the present invention; and

FIGS. 14A to 14D are waveform diagrams of signals generated in frame removal.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGS. 7 and 8, there is illustrated an apparatus for controlling recording and reproduction in a digital VCR in accordance with an embodiment of the present invention.

FIG. 7 is a block diagram illustrating a recording control circuit device for a digital VCR in accordance with the present invention. As shown in FIG. 7, the recording control circuit device includes a frame extracting unit 20 for buffering and amplifying an output signal V1, namely, compressed digital data, of an interface 1, and extracting specific data for speed-varied reproduction from the received signal V1, a frame recording position controlling unit 21 for selectively outputting an output V22 of the frame extracting unit 20 obtained after the buffering and amplifying operations and the extracted specific data V23, and outputting a multiplexing timing signal V27, a frame position information recording unit 19 for recording track position information and index information for speed-varied reproduction on a magnetic tape, based on the multiplexing timing signal V27, and a digital recording unit for recording the digital data including the index information on the magnetic tape.

In similar to the conventional case, the digital recording unit 18 includes an interleaving and channel-dividing circuit 2, recording formatters 3A and 3B, channel modulators 4A and 4B, recording amplifiers 5A and 5B, a head drum 6 equipped with heads HD1 to HD4, a drum pulse generator 7 and switches SW1 and SW2. With this construction, the digital recording unit 18 records digital signals including index signals on the magnetic tape. For simplicity of the description, the description concerning the digital recording unit 18 will be omitted.

The frame extracting unit 20 includes a buffer 22 adapted to buffer the output signal V1 of the interface 1 and thereby amplify it to a predetermined level, a frame detector 24 adapted to detect specific data corresponding to an intraframe, and a frame memory 23 adapted to store the detected specific data.

The frame recording position controlling unit 21 includes a track number calculator 28 adapted to calculate the number of tracks, a multiplexing timing generator 27 adapted to

_ /

operate an output SWP of the drum pulse generator 7 and thereby generate a multiplexing timing signal V27, a bit stuffing circuit 26 adapted to make the output signal V23 of the frame memory 23 have a constant data length when the output signal V23 is at an underflow state, and a multiplexer 25 adapted to multiplex the output signals V22 and V23 of the frame extracting unit 20 and thereby output a signal V25.

On the other hand, the frame position information recording unit 19 includes a frame position recorder 29 adapted to receive the multiplexing timing signal V27 from the frame recording position controlling unit 21 and record, on the leading portion of a track for varied speed, position information of a next track for speed change, and an index signal recorder 30 adapted to record index information of a track to be scanned by an index head 31.

In FIG. 7, the reference numeral 8 denotes a guide pin, 9 a capstan engaged with a pinch roller 10, M1 a drum motor, and M2 a capstan motor.

FIG. 8 is a block diagram illustrating a reproduction circuit device in accordance with the present invention. As shown in FIG. 8, the reproduction circuit includes a digital reproduction unit 32 for reproducing compressed digital data recorded on the magnetic tape, a frame position information detecting unit 33 for detecting index information from the magnetic tape and detecting information indicative of the position of a specific track, a tape speed controlling unit 34 for controlling the speed of the capstan motor M2, and a frame removing unit 35 for [a] removing specific data for speed-varied reproduction during a reproduction at a constant speed.

The digital reproduction unit 32 includes the head drum 6 equipped with the heads HD1 to HD4, the drum pulse generator 7, switches SW3 and SW4, reproduction amplifiers 11A and 11B, equalizers 12A and 12B, channel demodulators 13A and 13B, and sync-detecting and error-correcting circuit 14A and 14B. This construction of the digital reproduction unit 32 is similar to that of the conventional digital reproduction unit shown in FIG. 2. Therefore, the detailed description concerning the digital reproduction unit 32 will be omitted for simplicity of the description.

The frame position information detecting unit 33 includes an index signal detector 36 adapted to detect index information, a recording position-synchronized block detector 40 adapted to detect, from the outputs V16 and V17 of the sync-detecting and error-correcting units 14A and 14B, position information of a specific track including specific data recorded, and a recording position decoder 39 adapted to decode the detected position information.

The tape speed controlling unit 34 includes a capstan servo-speed calculating circuit 38 adapted to operate outputs V36 and V39 of the frame position frame detecting unit 33, and a drive signal generator 37 adapted to generate a drive signal V37 for controlling the speed of the capstan motor M2.

Finally, the frame removing unit 35 includes a frame removal timing generator 41 adapted to operate an output of the drum pulse generator 7 and outputs V36 and V39 of the frame position information detecting unit 33 and thereby generate a timing signal for removing specific data for speed-varied reproduction, a stuffing bit-detecting and removing circuit 42 adapted to detect and remove a stuffing bit added for preventing generation of the underflow of the frame memory 23, and a deformatter 16 adapted to convert an output of the digital reproduction unit 32 to the format having the signal form prior to recording.

Operations of the apparatus for controlling recording and reproduction in the digital VCR in accordance with the

-7-

present invention will be described, in conjunction with FIGS. 4 to 14.

First, in a recording mode, an input signal Vi such as a compressed HDTV signal or compressed normal TV signal is applied to the interface 1 which, in turn, converts the received signal into a signal V1 having the form capable of being recorded and reproduced.

The signal V1 from the interface 1 is then applied to the frame extracting unit 20. In the frame extracting unit 20, the received signal V1 is buffered and amplified by the buffer 22. By the buffering and amplifying operations, the signal V1 is delayed for a predetermined time. The frame detector 24 detects compressed I-frames repeated at intervals of n frames, from a bit stream encoded to have frames with different compressed bit lengths. The frame memory 23 stores data of the detected I-frames.

In other words, compressed digital data of the I-frames repeatedly present at intervals of n frames are separated from the encoded bit stream shown in FIG. 4 and then duplicatively recorded on a specific track because they can be independently decoded. A write enable signal W/E of high level is applied to the frame memory 23 only for the period of detecting I-frames from the encoded bit stream by the frame detector 24. As a result, the frame memory 23 can store only the compressed video data of the I-frames.

This procedure for detecting I-frames will be described in detail, in conjunction with FIG. 12. An input bit stream is received in the frame detector 24 and then decoded. The frame detector 24 detects a frame mark code from a header of each frame in the bit stream. When the frame mark code is detected, an increment in frame counted value is carried out. If I-frames are present at intervals of n frames, it is determined whether the number of counted frames equals a multiple of n (i.e., $k*n$, where $k=0, 1, 2, \ldots$). When the $(n*k)$th is detected, a write enable signal W/E of high level is applied to the frame memory 23, thereby enabling compressed digital data bits of a corresponding I-frame to be stored. When a next frame mark code is detected, a write enable signal W/E of low level is applied to the frame memory 23. As a result, it is possible to prevent frames of the frame bit stream other than I-frames from being stored.

The frame recording position controlling unit 21 sends selectively I-frame data V23 and record data V21 outputted from the frame extracting unit 20 to the digital recording unit 18 at a predetermined timing. Accordingly, a recording format shown in FIG. 9 is formed in the digital recording unit 18.

On the other hand, since the lengths of compressed data of frames are non-uniform, the frame memory 23 may encounter an underflow phenomenon that data stored in the frame memory 23 at the moment an I-frame is recorded in the frame memory 23 is insufficient or an overflow phenomenon that data stored in the frame memory 23 prior to recording of an I-frame is full.

This will be descried in detail. Assuming that the average bit rate of input data received in the interface 1 is R and the size of regions of the input data occupied by I-frames is α, the average bit rate of data to be recorded is expressed by $R+\alpha R$. This average bit rate of data is calculated in the track number calculator 28. In this case, α can be calculated from α=the number of tracks i for I-frames/ the number of tracks j for P-frames. Here, the number of tracks, i, is generally determined by the average bit rate of I-frames.

The multiplexing timing generator 27 operates an output V28 of the track number calculator 28 which calculates the number of I-frame tracks, i, and the number of P-frame

tracks, j. The multiplexing timing generator 27 also operates the output SWP of the drum pulse generator 7. By these operations, a reference pulse is calculated. One pulse of the output SWP of the drum pulse generator 7 corresponds to a recording period for one track in a case of recording one-channel data and to a recording period for two tracks in a case of recording two-channel data. Accordingly, the multiplexing timing generator 27 outputs a switching signal V27 enabling the multiplexer 25 to selectively output data V23 for double speed stored in the frame memory 23 and normally-recorded data (FIG. 10B) buffered and amplified by, the buffer 22, as shown in FIG. 10D.

In the output V22 from the buffer 22 shown in FIG. 10B, Δt represents the period for delaying outputting of I-frames present between the first recording track and a predetermined track so as to prevent an underflow phenomenon. In the worst case where an underflow phenomenon occurred in the frame memory 23, the bit stuffing unit 26 performs a bit stuffing operation for adding, to data of I-frames, escape synchronous codes and dummy bits capable of being detected in reproduction, so as to generate data having a constant length. On the other hand, where an overflow phenomenon occurred in the frame memory 23, a write enable signal W/E of low level is applied from the frame detector 24 to the frame memory 23 for a predetermined period.

In the frame position information recording unit 19, the frame position recorder 29 and the index signal recorder 30 receive the output V27 from the multiplexing timing signal generator 27 of the frame recording position controlling unit 21. The frame position recorder 29 outputs information V29 based on its frame position discrimination to the recording formatters 3A and 3B. Based on the information V29, the recording formatters 3A and 3B form a synchronous block including information indicative of the position of a track including a next I-frame recorded, in each video data region. The recording formatters 3A and 3B also record the recording position information in the first synchronous block recording position of the tracks including I-frames recorded, as shown in FIG. 9. Here, the recording position information represents the code converted from the number of tracks present between the track including the current I-frame recorded and the track including the next I-frame recorded, as shown in FIG. 11.

On the other hand, the index signal recorder 30 outputs index information V30, namely, a pulse indicative of whether an I-frame has been recorded or not, to the index head 31 which, in turn, records the index information V30 on a control track.

The above-mentioned overall operations will be described in detail. As the head drum 6 carrying the heads HD1 to HD4 is rotated by the driving force of the drum motor M1 while the magnetic tape engaged between the capstan 9 and the pinch roller 10 is fed by the driving force of the capstan motor M2, the interface 1 receiving the input signal Vi such as the compressed HDTV signal or the normal TV signal applies its output V1 to the frame extracting unit 20. Thereafter, the recorded data is buffered and amplified in the buffer 22 for a predetermined period while the I-frame data is stored in the frame memory 23 in accordance with the write enable signal W/E from the frame detector 24.

Subsequently, the multiplexer 25 receives selectively the output V22 from the buffer 22 and the output V23 from the frame memory 23, based on the output V27 from the multiplexing timing generator 27. As a result, the multiplexer 25 outputs the output signal V25 as shown in FIG.

10D to the digital recording unit 18. Thereafter, the interleaving and channel-dividing circuit 2 of the digital recording unit 18 interleaves the signal V25 to a predetermined form for reducing burst errors and then outputs signals V2 and V3 channel-divided to be matched with a recording channel bandwidth to the recording formatters 3A and 3B, respectively.

Accordingly, the recording formatters 3A and 3B form synchronous blocks shown in FIG. 6 so as to add synchronous signals SYNC, identification signals ID and error correction codes ECC. The recording formatters 3A and 3B also form position information blocks of recording tracks, based on the output V29 from the frame position recorder 29 in the frame position information recording unit 19, thereby forming position information about the first synchronous blocks of the tracks including I-frames recorded.

Outputs V4 and V5 are converted to a predetermined recording format in the channel modulators 4A and 4B, amplified to a predetermined level by the recording amplifiers 5A and 5B, and then selectively sent to the heads HD1 (or HD3) and HD2 (or HD4) via the switches SW1 and SW2 switched by the output SWP of the drum pulse generator 7 generated by the rotation of the drum motor M1.

Thus, the outputs of the recording amplifiers 5A and 5B selectively applied to the heads HD1 (or HD3) and HD2 (or HD4) via the switches SW1 and SW2 being switched are recorded on the magnetic tape in a recording format shown in FIG. 9.

On the other hand, when a speed-varied reproduction mode is selected in a case where the data of the recording format shown in FIG. 9 has been recorded on the magnetic tape, the data recorded on the magnetic tape is reproduced in the digital reproduction unit 32. That is, signals recorded on the magnetic tape are detected by the heads HD1 (or HD3) and HD2 (or HD4) while the magnetic tape engaged between the capstan 9 and the pinch roller 10 rotated by the capstan motor M2 travels on the head drum 6 driven by the drum motor M1.

The signals detected by the heads HD1 (or HD3) and HD2 (or HD4) are sent to the reproduction amplifiers 11A and 11B via the switches SW3 and SW4 switched by the output SWP of the drum pulse generator 7, respectively. The signals received in the reproduction amplifiers 11A and 11B are amplified to a predetermined level and then sent to the equalizers 12A and 12B which, in turn, compensate distortions of frequency characteristics of the amplified signals V10 and V11, respectively. Resultant signals V12 and V13 from the equalizers 12A and 12B are then applied to the channel demodulators 13A and 13B which, in turn, demodulate the output signals V12 and V13 to the original signal forms, respectively.

Output signals V14 and V15 from the channel demodulators 13A and 13B are received in the sync-detecting and error-correcting circuits 14A and 14B which, in turn, detect respectively synchronous signals SYNC and identification signals ID from the received signals V14 and V15 and remove error components included in the recorded data. Resultant signals V16 and V17 from the sync-detecting and error-correcting circuits 14A and 14B are applied to the deinterleaving circuit 15A and 15B which, in turn, deinterleave the signals V16 and V17 to the original signal forms, respectively. Resultant signals V18 and V19 are then sent to the deformatter 16 of the frame removing unit 35.

At this time, the frame position information detecting unit 33 detects index information recorded on a control track disposed at the lower edge of the magnetic tape by the index

head 31. The index information is a pulse indicative of a
track including an I-frame. On the other hand, the recording
position-synchronized block detector 40 detects recording
position-synchronized blocks recorded with I-frames from
the outputs V16 and V17 of the sync-detecting and error-
correcting circuits 14A and 14B. Upon detecting the index
information in order to achieve a discrimination for the
position of a specific track, the index signal detector 36 takes
into consideration the time taken to control a speed matched
with a speed multiple and calculated in the capstan servo
speed calculator 38 of the tape speed controlling unit 34. The
physical position of the index head 31 is determined by the
processing speed of the capstan servo speed calculator 38.

The recording position-synchronized block detector 40
also detects the outputs V16 and V17 of the sync-detecting
and error-correcting circuits 14A and 14B and separates
recording position-synchronized blocks shown in FIG. 11
from the detected signals V15 and V17. The recording
position-synchronized block detector 40 outputs a signal [40] V40
which is indicative of codes relating to the speed multiple
and selected from codes indicative of relative positions and
present in the separated synchronous blocks. The recording
position decoder 39 decodes the signal V40 received from
the recording position-synchronized block detector 40 [and] based on
the speed multiple n. An optional code DIFi present in each
synchronous block is a code indicative of the number of
tracks present between the current track and the i-th track
including specific data recorded.

Accordingly, the frame position information detecting
unit 33 detects specific track position information periodi-
cally or non-periodically recorded and track position infor-
mation about I-frames recorded in the recording position-
synchronized blocks, taking into consideration the
calculation time taken to control the speed of the capstan
motor M2 and the driving time. In this connection, the
capstan servo speed calculator 38 receives the position
information V36 from the index signal detector 36 and the
position information V39 from the recording position
decoder 39 and thereby calculates the rotation speed of the
capstan motor M2 in accordance with the input speed
multiple n. Resultant signal V38 from the capstan servo
speed calculator 38 is then applied to the capstan servo
driving signal generator 37 which, in turn, controls the speed
of the capstan motor M2 so that the capstan motor M2 can
be driven repeatedly at a normal speed and a high speed. As
a result, the heads HD1 to HD4 mounted on the drum 6
repeatedly travel at the normal speed on specific tracks of the
magnetic tape and jump travel on other tracks, thereby
enabling reproduction of speed-varied videos.

FIGS. 13A to 13C illustrate an example of a capstan servo
speed control in a case where speed-varied specific data
have been recorded on every two-track at intervals of four
tracks. In this case, the capstan motor M2 is driven two
tracks at a normal speed in the same direction as the
recording tracks for the first half of the initial cycle shown
in FIG. 13B. For the next half of the initial cycle, the capstan
motor M2 is driven four tracks at a high speed. During the
accelerated driving, the capstan motor M2 exhibits the
driving characteristic shown in FIG. 13A because the output
V37 of the capstan servo driving signal generator 37 is
periodically varied in level, as shown in FIG. 13C. By virtue
of such a speed-varied driving of the capstan motor M2, it
is possible to reduce an excessive characteristic of the
capstan servo speed.

The outputs V18 and V19 from the digital reproduction
unit 32 resulted from the speed-varied reproduction are sent
to the deformatter 16 of the frame removing unit 35,

13 /1

converted into the signal form prior to the recording, and then outputted as a speed-varied reproduced signal Vo such as a digital HDTV signal or a normal TV signal via the interface 17.

For the signal conversion in the deformatter 16, it is required to remove the stuffing bits or dummy bits added for preventing the underflow phenomenon of the frame memory 23 upon recording data for varied speed on specific tracks. To this end, the stuffing bit-detecting and removing circuit 42 supplies a bit removing signal V42 for preventing any bit string from being outputted to the interface 17 when a stuffing synchronous code recorded at the starting portion of stuffing bits is detected. The supplying of the bit removing signal V42 is continued until a stuffing bit end code is detected.

In the reproduction at the normal speed, the frame removing unit 35 also separates data of recording tracks for varied speed so that the I-frame data recorded on the magnetic tape for the speed-varied reproduction is prevented from being outputted to the interface 17 and thereby being included in the reproduced signal Vo.

On the other hand, the frame removal timing generator 41 receives position information of tracks recorded with specific data for varied speed from both the recording position decoder 39 and the index signal detector 36 of the frame position information detecting unit 33. Based on the output SWP of the drum pulse generator 7 shown in FIG. 14A, the frame removal timing generator 41 then outputs a frame removing signal V41 shown in FIG. 14C to the deformatter 16.

. Based on the frame removing signal V41, the deformatter 16 removes I-frame data from the signals V18 and V19 (FIG. 14B) received from the deinterleaving circuits 15A and 15B of the digital reproduction unit 32. As a result, the deformatter 16 outputs a signal V20 shown in FIG. 14D, thereby enabling the reproduction at the normal speed.

As apparent from the above description, the present invention provides an apparatus for controlling recording and reproduction in a magnetic VCR capable of separating specific data for a speed-varied reproduction from compressed digital video signals and recording them on designated tracks in a recording mode, recording position information of the designated tracks on a control track by an index head or recording position information of recording position-synchronized blocks at the starting portions of the designated tracks recorded with the specific data so as to accurately scan the designated tracks in a reproduction mode, controlling a capstan servo speed so as to maintain the travel of a magnetic tape at a normal speed and periodically or non-periodically accelerate or decelerate it where specific data for varied-speed have been recorded periodically or non-periodically on predetermined portions of tracks, thereby making heads travel repeatedly at the normal speed and the high speed and thereby detect continuously the specific tracks for varied-speed. In accordance with the apparatus, the specific data for a speed-varied reproduction is removed in the reproduction at the normal speed. Thus, the reproduction at the normal speed can be accomplished.

Accordingly, the present invention provides a repeatability of reproduced video at a varied speed without any deterioration in picture quality in that it enables recording of specific data for speed-varied reproduction and continuous detection of the specific data in the speed-varied reproduction.

Although the preferred embodiments of the invention have been disclosed for illustrative purposes, those skilled in

the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

What is claimed is:

1. An apparatus for controlling recording and reproducing in a video cassette tape recorder comprising:

frame extracting means for buffering compressed digital data input thereto, and extracting specific data for a speed-varied reproduction from said compressed digital data;

frame recording position controlling means for calculating a number of tracks for recording the compressed digital data and selectively outputting a buffered output, said extracted specific data from said frame extracting means, and a multiplexing timing signal;

frame position information recording means for recording position information of specific tracks for the speed-varied reproduction and index information on a magnetic tape, based on said multiplexing timing signal;

digital recording means for recording digital signals including said digital data and said index information on said magnetic tape;

digital reproduction means for reproducing the digital signals recorded on the magnetic tape;

frame position information detecting means for detecting said position information of the specific tracks for the speed-varied reproducing and said index information;

tape speed controlling means for controlling the speed of a capstan motor, based on said detected index information and said position information of the specific tracks; and

frame removing means for receiving an output from the digital reproduction means and removing unnecessary bit streams from the specific data.

2. An apparatus in accordance with claim 1, wherein said frame extracting means comprises:

an interface for receiving said compressed digital data;

a buffer for buffering an output of said interface for a predetermined period;

a frame detector for detecting said specific data from said output of the interface and outputting a write enable signal; and

a frame memory for selecting and storing the detected specific data, based on said write enable signal.

3. An apparatus in accordance with claim 2, wherein said frame detector counts a number of frames when a frame mark code is detected from a bit stream of said output of the interface, and enables said write enable signal when said counted number of frames is determined to be the same as an interval number at which I-frames are present.

4. An apparatus in accordance with claim 1, wherein said frame recording position controlling means comprises:

a track number calculator for calculating an average bit rate of said compressed digital data, the size of the specific data, a number of tracks for recording said specific data and a number of tracks present between said specific tracks;

a multiplexing timing generator for receiving an output from said track number calculator and outputting a switching signal for positioning the specific data on said specific tracks in accordance with a head switching signal;

a multiplexer for selecting an output from said frame extracting means, based on an output from said multi-

13

plexing timing generator and sending said selected output to said digital recording means; and

a bit stuffing circuit for filling insufficient data with bit streams or dummy bits when said selected output of the frame extracting means is at an underflow state.

5. An apparatus in accordance with claim 1, wherein said frame position information recording means comprises:

a frame position recorder for receiving an output from said frame recording position controlling means and outputting position discrimination information to said digital recording means so as to record position information of a next specific track on an initial synchronous block of a track having said specific data recorded thereon; and

an index signal recorder for recording position information of said track having said specific data recorded thereon on a control track of said magnetic tape by an index head.

6. An apparatus in accordance with claim 1, wherein said frame position information detecting means comprises:

an index signal detector for detecting index information recorded on a control track of said magnetic tape, said index information indicating whether tracks recorded with said specific data are present;

a recording position-synchronized block detector for detecting an output from said digital reproduction means and detecting recording position-synchronized blocks recorded with codes indicative of relative position information of said tracks recorded with said specific data; and

a recording position decoder for decoding an output of said recording position-synchronized block detector, based on a number of different tape speeds, and thereby outputting a signal for calculating a capstan servo speed.

7. An apparatus in accordance with claim 1, wherein said tape speed controlling means comprises:

a capstan servo speed calculator for calculating a capstan servo speed for repeating a normal speed travel on said specific tracks and a high speed travel on tracks between adjacent specific tracks in a speed-varied reproduction by using the position information of the specific track from said frame position information detecting means based on a number of different tape speeds; and

a capstan servo drive signal generator for controlling driving of said capstan motor, based on an output of said capstan servo speed calculator.

8. An apparatus in accordance with claim 1, wherein said frame removing means comprises:

a deformatter for converting an output of said digital reproduction means to a signal form prior to recording;

a stuffing bit-detecting and removing circuit for outputting a bit removing signal to said deformatter and removing stuffing bits or dummy bits added for preventing generation of an underflow of said frame extracting means in the speed-varied reproduction; and

a frame removal timing generator for receiving said position information of the specific tracks from said frame position information detecting means and outputting a frame removing signal to the deformatter, based on a head switching signal, thereby preventing outputting of said specific data in a normal-speed reproduction.

9. An apparatus in accordance with claim 1, wherein said specific data includes I-frames.

16

10. An apparatus in accordance with claim 1, wherein said digital recording means and said digital reproduction means include a plurality of heads and switches for selectively recording and reproducing the digital signals.

11. An apparatus for controlling recording in a video cassette tape recorder comprising:

frame extracting means for receiving compressed digital data input thereto and extracting specific data for a speed-varied reproduction from said compressed digital data;

frame recording position controlling means for generating a multiplexing timing signal and multiplexing said compressed digital data and said extracted specific data from said frame extracting means based on said multiplexing timing signal;

frame position information recording means for recording index information and position information of specific tracks for recording said specific data for the speed-varied reproduction on a magnetic tape based on said multiplexing timing signal; and

digital recording means for recording digital signals including said digital data and specific data from said frame recording position controlling means on the magnetic tape.

12. An apparatus in accordance with claim 11, wherein said frame extracting means includes:

an interface for receiving said compressed digital data;

a buffer for buffering an output of said interface for a predetermined period;

a frame detector for detecting said specific data from said output of the interface and outputting a write enable signal; and

a frame memory for selecting and storing said specific data based on said write enable signal.

13. An apparatus in accordance with claim 12, wherein said frame detector starts counting frames when a frame mark code is detected from a bit stream of said output of the interface, and enables said write enable signal when said counted frame number equals an interval number at which I-frames are present.

14. An apparatus in accordance with claim 11, wherein said frame recording position controlling means includes:

a track number calculator for calculating a number of said specific tracks for recording said specific data and a number of tracks present between said specific tracks;

a multiplexing timing generator for generating said multiplexing timing signal based on an output from said track number calculator; and

a multiplexer for selecting an output from said frame extracting means based on said generated multiplexing timing signal.

15. An apparatus in accordance with claim 14, wherein said frame recording position controlling means includes a bit stuffing circuit for filling insufficient data with bit streams or dummy bits when said selected output of the frame extracting means is at an underflow state.

16. An apparatus in accordance with claim 11, wherein said frame position information recording means includes:

a frame position recorder for receiving an output from said frame recording position controlling means and outputting position discrimination information to said digital recording means so as to record said position information of said specific tracks; and

an index signal recorder for recording said index information on a control track of the magnetic tape, said

27/15

index information including information indicating whether said specific tracks for said specific data are present.

17. An apparatus in accordance with claim 11, wherein said specific data includes I-frames, and said digital recording means includes a plurality of heads and switches for selectively recording said digital signals.

18. An apparatus in accordance with claim 11, wherein said digital recording means includes an interleaving and channel driving circuit, a plurality recording formatters, and a plurality of channel modulators, for formatting said digital signals so as to record said digital signals on the magnetic tape.

19. A method for controlling recording and reproduction in a video cassette tape recorder, comprising the steps of:

extracting specific data for a speed varied reproduction from compressed digital data;

calculating a number of tracks for recording said digital data and outputting a multiplexing timing signal based on said calculated number of tracks;

recording position information of specific tracks for the speed varied reproduction and index information on a magnetic tape based on said multiplexing timing signal;

recording digital signals including said digital data and said index information on the magnetic tape;

reproducing said digital signals recorded on the magnetic tape;

detecting said position information of the specific tracks
for the speed varied reproduction and said index infor-
mation;

controlling the speed of a capstan motor based on said
detected index information and position information of
the specific tracks; and

removing unnecessary bit streams from said specific data.

20. A method in accordance with claim 19, wherein said
specific data includes I-frames.

21. A method of controlling recording in a video cassette
tape recorder, comprising the steps of:

extracting specific data for a speed-varied reproduction
from compressed digital data;

generating a multiplexing timing signal and multiplexing
said compressed digital data and said extracted specific
data based on said multiplexing timing signal;

recording index information and position information of
specific tracks for recording said specific data for the
speed-varied reproduction on a magnetic tape based on
said multiplexing timing signal; and

recording digital signals including said multiplexed digi-
tal data and specific data on the magnetic tape.

22. A method in accordance with claim 21, wherein said
generating step includes calculating a number of tracks for
recording said digital data and generating said multiplexing
timing signal based on said calculated number of tracks.

23. An apparatus for controlling recording in a digital recording device, comprising:

an input unit receiving digital video data;

a detection circuit coupled to the input unit and detecting specific data from the received digital video data;

a data generating circuit coupled to the detection circuit and generating a plurality of relative position data, each of the plurality of relative position data indicative of a plurality of relative positions from a current specific data location to each of a plurality of consecutive specific data locations; and

a recording unit coupled to the data generating circuit and recording the digital video data, the detected specific data, and the plurality of relative position data on a digital medium.

24. The apparatus of claim 23, wherein the specific data is I-frame data.

25. The apparatus of claim 23, wherein the data generating circuit includes:

a timing signal generating circuit generating a timing control signal; and

a multiplexer coupled the timing signal generating circuit and selectively outputting the detected specific data and the digital video data based on the timing control signal.

26. The apparatus of claim 23, wherein the digital medium includes a magnetic medium.

27. The apparatus of claim 23, wherein each of the plurality of relative position data includes a plurality of distance indicators, each distance indicator indicating a distance between the current specific data location and one of the consecutive specific data locations.

28. The apparatus of claim 27, wherein said distance is represented with a number of distance units present between the current specific data location and one of the consecutive specific data locations.

29. The apparatus of claim 28, wherein the distance unit is a track on the storage medium.

30. The apparatus of claim 23, wherein the recording unit includes:

a formatting circuit coupled to the detection circuit and forming a synchronous block including one of the plurality of relative position data therein for each video data region.

31. The apparatus of claim 30, wherein the video data regions are I-frame data regions.

32. The apparatus of claim 31, wherein the recording unit records the synchronous block on the digital medium for each I-frame data region.

33. An apparatus for controlling reproduction in a digital reproducing device, comprising:

a reproducing unit reproducing digital data stored on a digital medium, the digital data including a plurality of specific data and a plurality of relative position data, each relative position data indicative of a plurality of relative positions from a current specific data location to each of a plurality of consecutive specific data locations;

a detection circuit coupled to the reproducing unit and detecting one of the plurality of relative position data from the reproduced digital data; and

a control circuit coupled to the detection circuit, receiving a variable-speed command and controlling the reproducing unit to reproduce at least another specific data based on the detected relative position data and the variable-speed command.

34. The apparatus of claim 33, wherein the detection circuit includes:

a decoding circuit selecting one of the relative positions represented in said detected relative position data based on the variable-speed command.

35. The apparatus of claim 33, wherein the specific data is I-frame data.

36. The apparatus of claim 33, wherein each of the plurality of relative position data includes a plurality of distance indicators, each distance indicator indicating a distance between the current specific data location and one of the consecutive specific data locations.

37. The apparatus of claim 36, wherein said distance is represented with a number of distance units present between the current specific data location and one of the consecutive specific data locations.

38. The apparatus of claim 37, wherein the distance unit is a track on the digital medium.

21

39. The apparatus of claim 33, wherein the reproducing unit includes a motor for moving the digital medium.

40. The apparatus of claim 39, wherein the control circuit includes:

a calculating circuit calculating a rotational speed of the motor based on the detected relative position data.

41. The apparatus of claim 33, wherein the reproducing unit includes reading heads and signal processing circuits.

42. A method for controlling recording in a digital recording device, comprising the steps of:

receiving digital video data;

detecting specific data from the received digital video data;

generating a plurality of relative position data, each of the plurality of relative position data indicative of a plurality of relative positions from a current specific data location to each of a plurality of consecutive specific data locations; and

recording the digital video data, the detected specific data, and the plurality of relative position data on a digital medium.

43. The method of claim 42, wherein in said detecting step, the specific data is I-frame data.

44. The method of claim 42, further comprising the step of:

generating a timing control signal; and

wherein said recording step includes,

recording the digital video data and the detected specific data based on the timing control signal.

45. The method of claim 42, wherein in said recording step, the digital medium includes a magnetic medium.

46. The method of claim 42, wherein each of the plurality of relative position data includes a plurality of distance indicators, each distance indicator indicating a distance between the current specific data location and one of the consecutive specific data locations.

47. The method of claim 46, wherein said distance is represented with a number of distance units present between the current specific data location and one of the consecutive specific data locations.

48. The method of claim 47, wherein the distance unit is a track on the digital medium.

49. The method of claim 42, wherein said recording step includes the step of:

forming a synchronous block including one of the plurality of relative position data therein for each video data region.

50. The method of claim 49, wherein in said forming step, the video data regions are I-frame data regions.

51. The method of claim 50, wherein said recording step includes the step of recording the synchronous block on the digital medium for each I-frame data region.

52. A method for controlling reproduction in a digital reproducing device, comprising the steps of:

reproducing digital data stored on a digital medium, the digital data including a plurality of specific data and a plurality of relative position data, each relative position data indicative of a plurality of relative positions from a current specific data location to each of a plurality of consecutive specific data locations;

detecting one of the plurality of relative position data from the reproduced digital data;

receiving a variable-speed command; and

reproducing at least another specific data based on the detected relative position data and the variable-speed command.

53. The method of claim 52, wherein said reproducing step includes the step of:

decoding the detected relative position data by selecting one of the relative positions represented in the detected relative position data based on the variable-speed command to reproduce the at least another specific data.

54. The method of claim 52, wherein the specific data is I-frame data.

55. The method of claim 52, wherein each of the plurality of relative position data includes a plurality of distance indicators, each distance indicator indicating a distance between the current specific data location and one of the consecutive specific data locations.

56. The method of claim 55, wherein said distance is represented with a number of distance units present between the current specific data location and one of the consecutive specific data locations.

57. The method of claim 56, wherein the distance unit is a track on the digital medium.

58. The method of claim 52, wherein said reproducing step includes the step of:
calculating a rotational speed of a motor for moving the digital medium based on the detected relative position data.

CONVENTIONAL ART
FIG. I

CONVENTIONAL ART
FIG. 3

CONVENTIONAL ART
FIG. 2

FIG .4

P-FRAME

I-FRAME

0 ..... 1 ..... 2 ..... i ..... i+1 ..... n 2n

FIG .5

FRAME HEADER

COMPRESSED DATA OF O-TH FRAME

COMPRESSED DATA OF FIRST FRAME

COMPRESSED DATA OF n-th FRAME

FIG. 6

5588098 · 07209
SYNC. BLOCK

SYNC ID	VIDEO DATA	E.C.C	SYNC ID

FIG .9

I-FRAME DELAY TIME

I-FRAME POSITION
INFORMATION SYNC.
BLOCK

I-TRACKS

J-TRACKS

I-FRAME DATA
-RECORDED TRACKS

INDEX INFORMATION

FIG. 7

FIG. 8

8602/0"4288TT60

FIG .10A

FIG .10B

FIG .10C

FIG .10D

SWP

V22

V23

V25

Δt

(i/2)PULSES

J/2 PULSES

I,P-FRAME   I,P-FRAME   I,P-FRAME   I,P-FRAME

I-FRAME   I-FRAME   I-FRAME
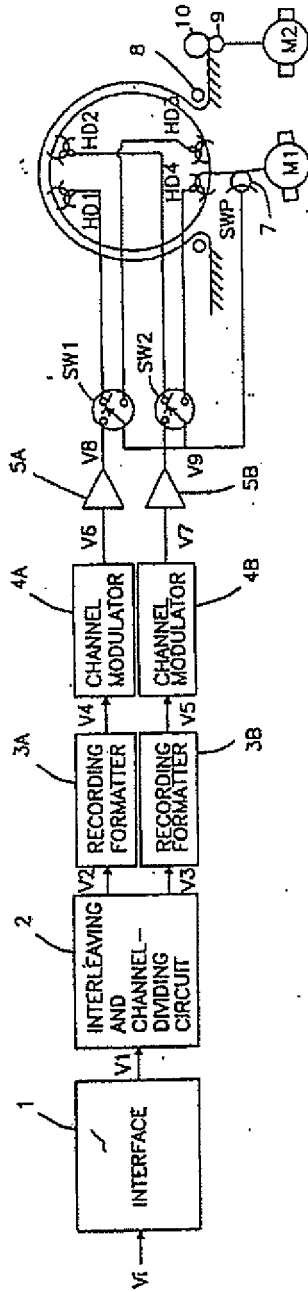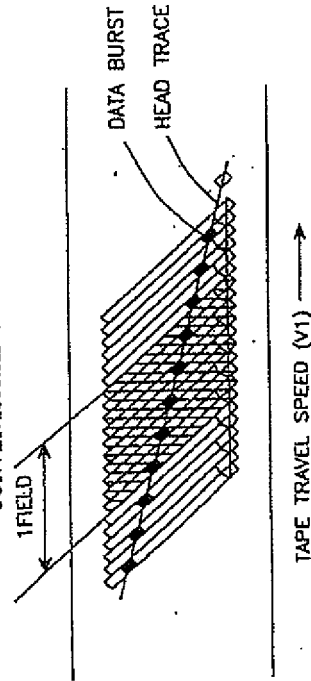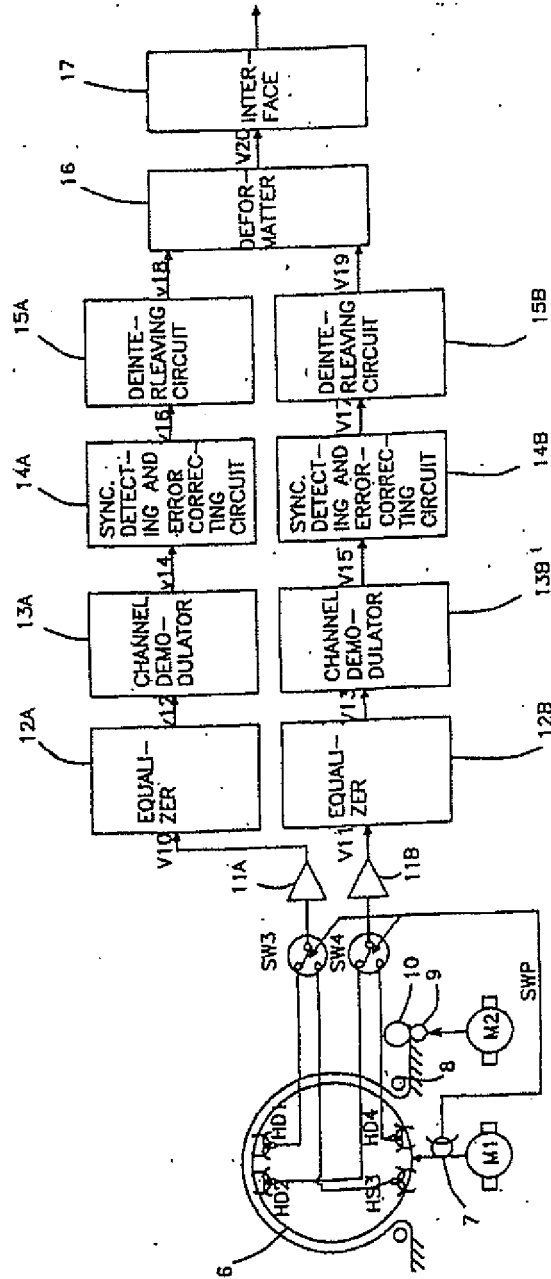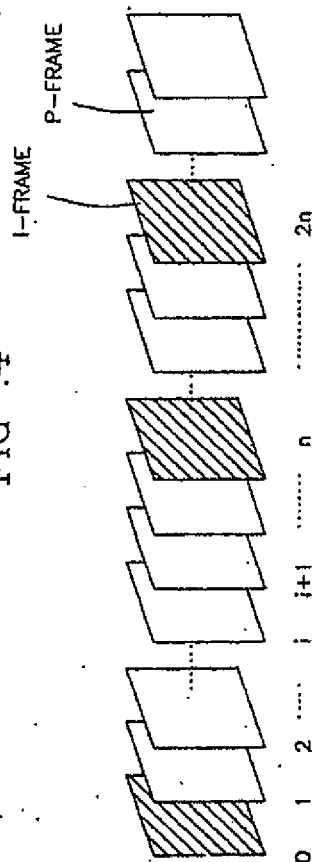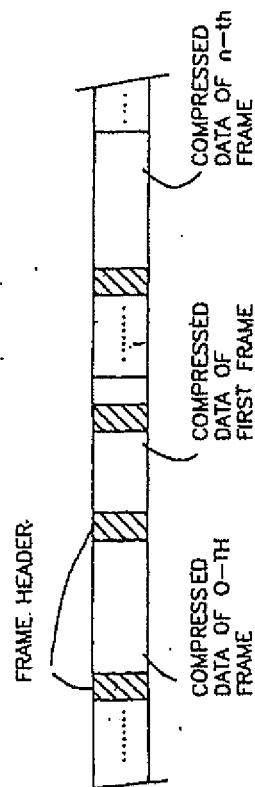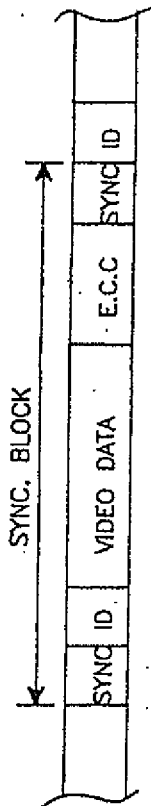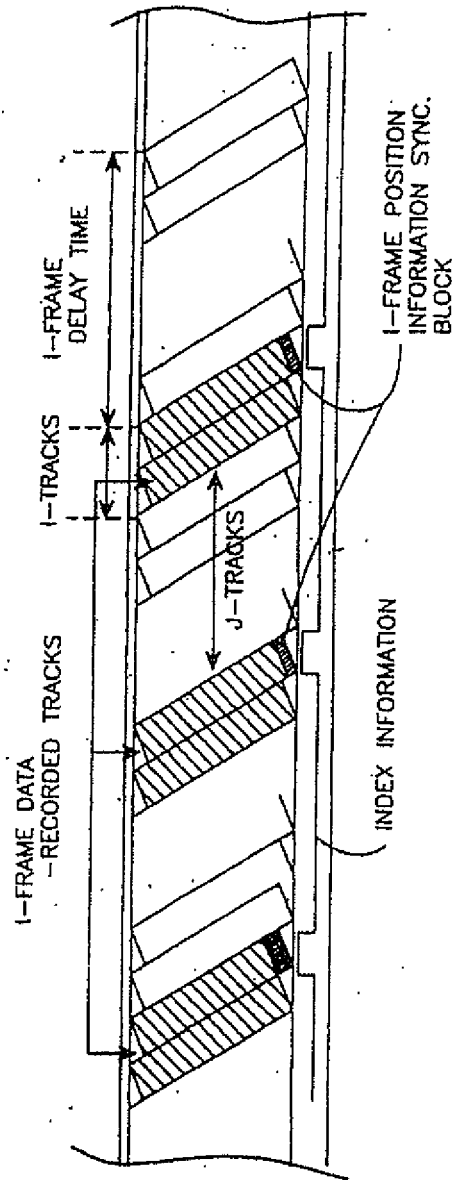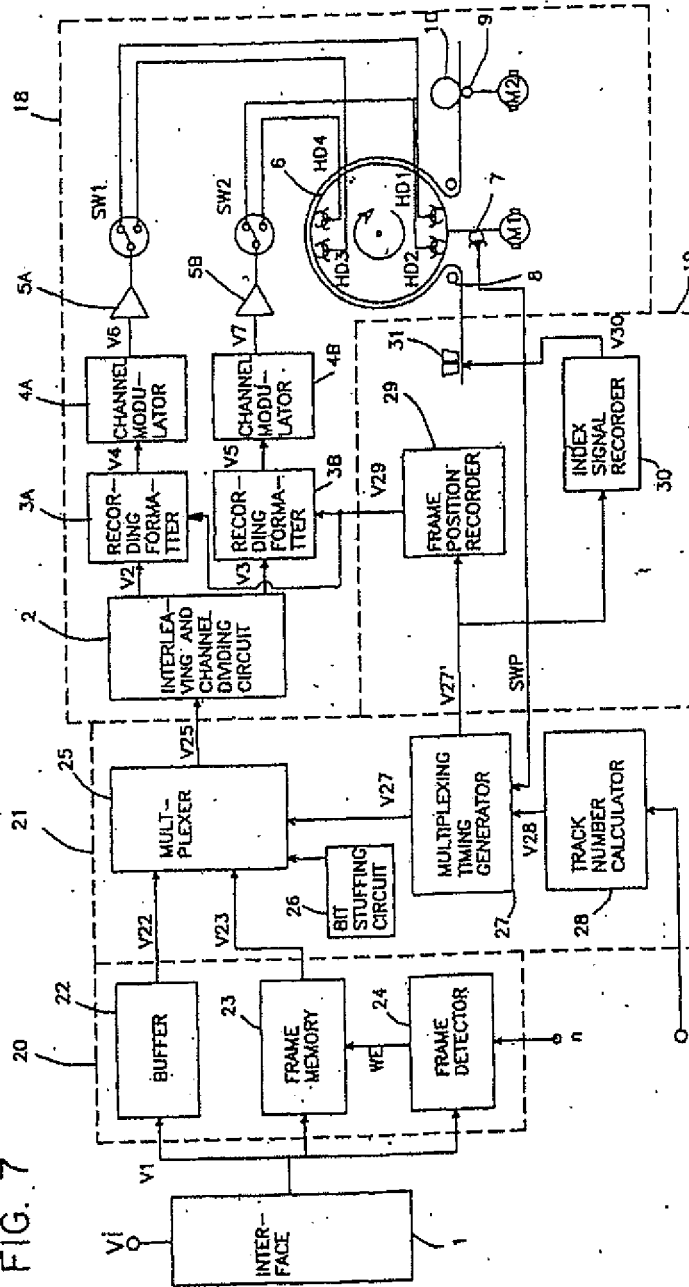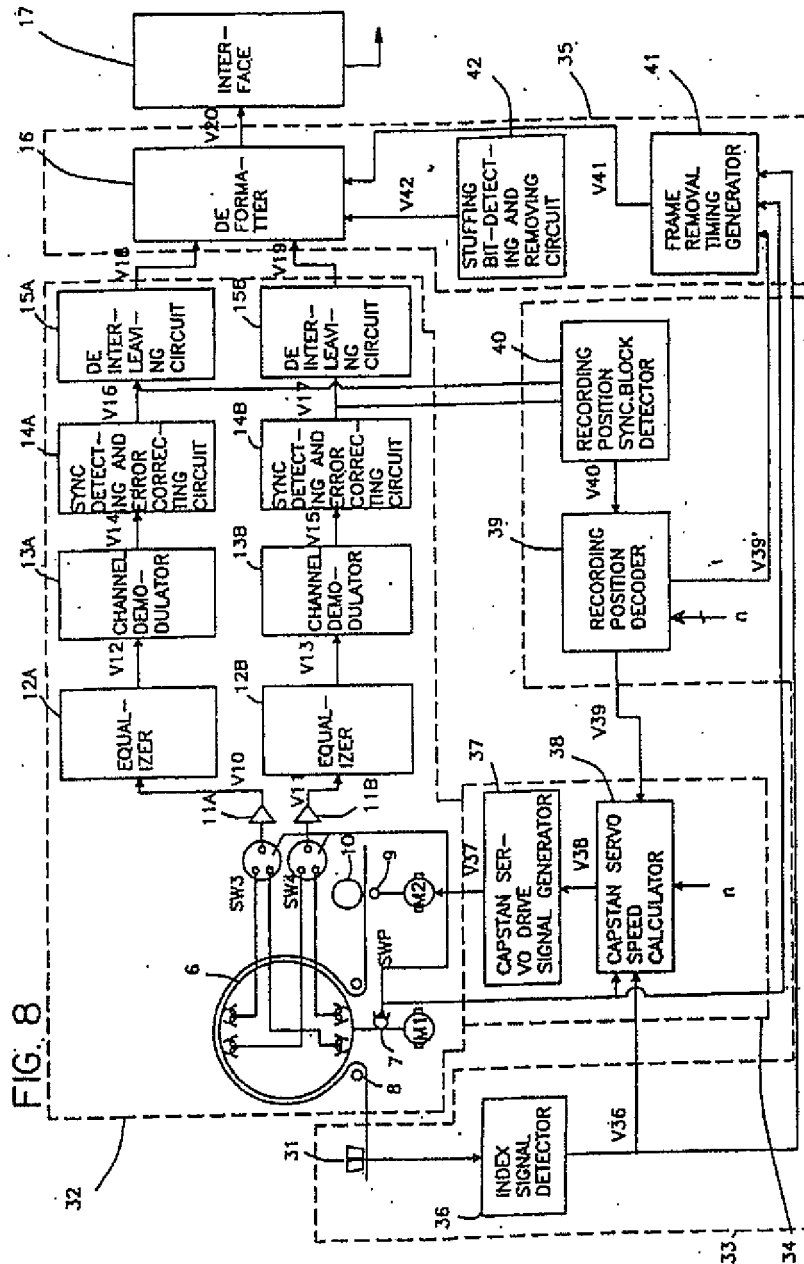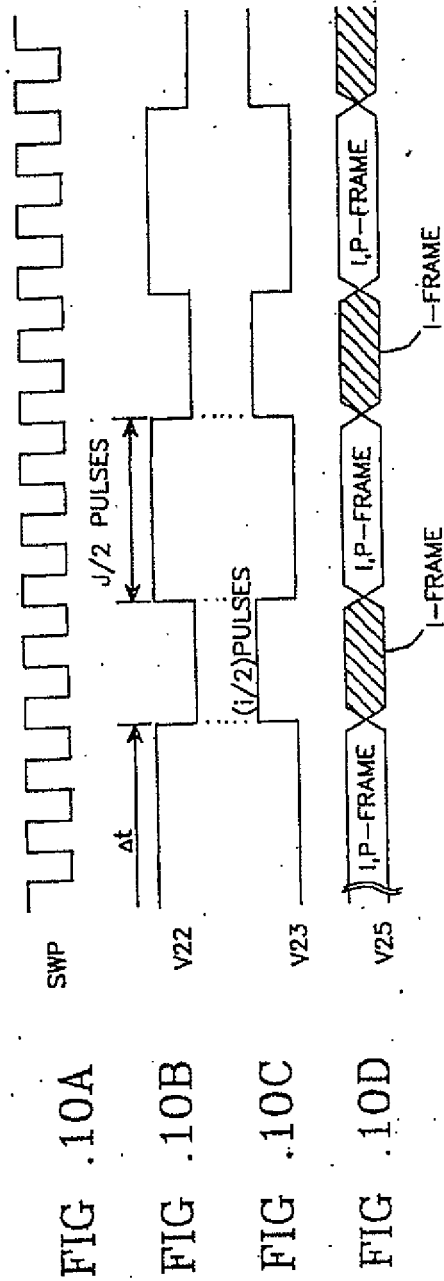
FIG .11

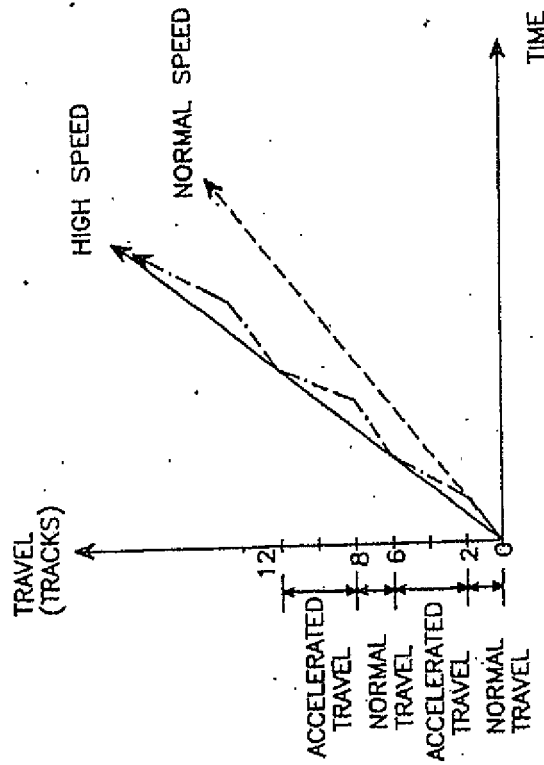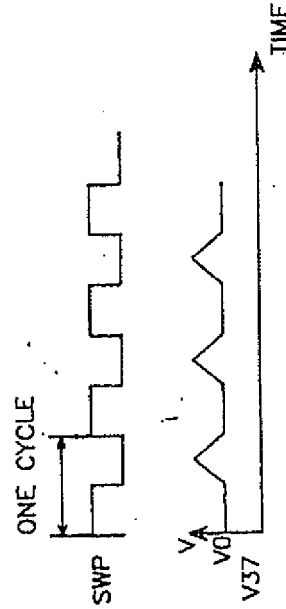| SYNC | ID | DIF1 | DIF2 | ...... | DIFn | ECC |
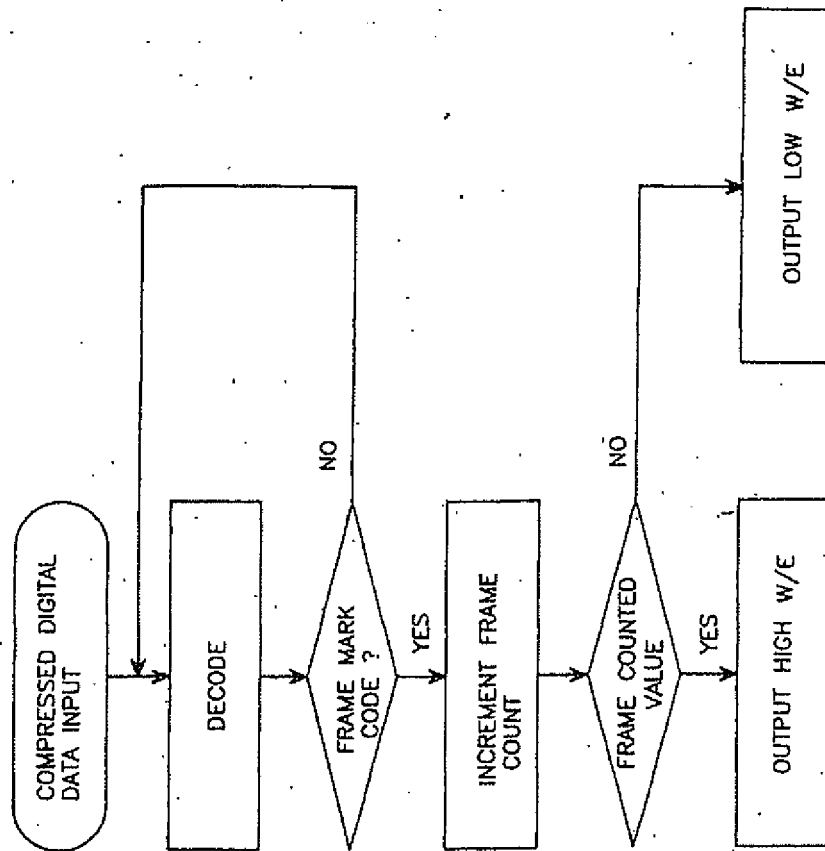
FIG. 12

FIG .13A
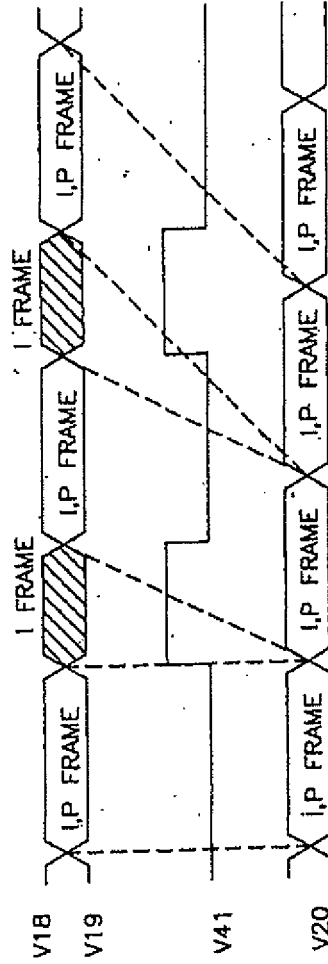
FIG .13B

FIG .13C

FIG .14A

FIG .14B

FIG .14C

FIG .14D

IN THE U.S. PATENT AND TRADEMARK OFFICE

APPLICANT: Je H. LEE et al.

SERIAL NO.:   09/118,824
(Subsequently reissued as U.S. RE38,868 on
November 8, 2005)
(Reissue of U.S. Patent No. 5,587,789, which issued on
December 24, 1996)

FILED: July 20, 1998

FOR: APPARATUS AND METHOD FOR CONTROLLING
RECORDING AMD REPRODUCTION IN DIGITAL
VIDEO CASSETTE TAPE RECORDER

SUPPLEMENTAL SWORN STATEMENT OF DAE SUL SHIM

This Supplemental Sworn Statement is supplemental to the Sworn

Statement of Dae Sul Shim, filed with U.S. Patent and Trademark Office on March

17, 2008 with a Petition Under 37 §§ 1.67 and 1.182 To Place Supplemental

Declarations and Sworn Statements In File, in relation to U.S. reissue application

09/118,824.

I, Dae Sul Shim, hereby declare as follows:

My name, residence and citizenship are indicated below.

I am currently a Senior Manager of the Intellectual Property Center for LG

Electronics Inc. ("LGE"). In 1998, I was a member of the Multimedia Patent

Team. As a member of the Multimedia Patent Team, I assisted in the preparation

and filing of materials related to reissue application 09/118,824 ("the '824 Reissue

Application"), which reissued as U.S. RE38,868 ("the '868 Reissue Patent"). The

'868 Reissue Patent is a reissue of U.S. Patent 5,587,789 ("the Original '789

Patent"), which issued from U.S. patent application 08/227,281 ("the Original '281

Application").

Upon information and belief, Mr. Jehyoung Lee, one of the co-inventors of

the '868 Reissue Patent and the Original '789 Patent, reviewed and understood the

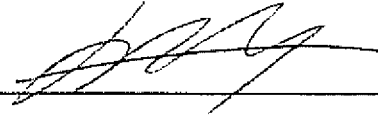contents of the Original '281 Application.

In view of Mr. Lee's prior review and understanding of the content and

claims of the Original '281 Application, and in further view of my email to Mr. Lee

explaining the substance of the Combined Reissue Declaration and Power of

Attorney for the '824 Reissue Application (the "Reissue Declaration"), I believed in

good faith that Mr. Lee had sufficiently "reviewed and underst[ood] the contents of

the ['824] reissue application including original claims 1-22 and newly submitted

claims 23-58," as stated in the Reissue Declaration, and I did not intend to deceive

the U.S. Patent and Trademark Office at the time that I had Mr. Lee's name signed

on the Reissue Declaration on Mr. Lee's behalf.

I further declare that all statements made herein of my own knowledge are

true, and that all statements made on information and belief are believed by me to

be true. These statements are made with the knowledge that willful false

statements and the like so made are punishable by fine or imprisonment, or both,

under Section 1001 of Title 18 of the United States Code and that such willful false

2

statements may jeopardize the validity of the '868 Reissue Patent that reissued from

the '824 Reissue Application.

Dae Sul SHIM   Signature:

                                Date: May. 15, 2008

Residence: Seoul, Korea
Citizenship: Republic of Korea
Address: 1502-805 KyungNam AnusBill Apartment,
              ShinJung Dong, Yang Cheon Gu, Seoul 158-072, KOREA

3